



浙江芯芯电子有限公司
ZHEJIANG XINXIN ELECTRICAL CO., LTD.

产品规格书

Specification of Products

产品名称：三相整流桥模块

产品型号：MDS250A

浙江芯芯电子有限公司

ZHEJIANG XINXIN ELECTRICAL CO., LTD.

地址：浙江省缙云县壶镇镇浙江丽缙五金科技产业园苍山区块内

电话： 13857067071

邮编： 321404

E-mail:247145749@qq.com


<http://www.zjxxdz1.com>

拟制	审核	核准
丁国盛	李园利	麻伟阳

版本号：04 更新日期：2022.6.28

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_j (C)	VALUE			UNIT
				Min	Type	Max	
I_o	DC output current	Three-phase full wave rectifying circuit, $T_c=100$ C	150			250	A
V_{RRM}	Repetitive peak reverse voltage	V_{RRM} tp=10ms $V_{RsM}=V_{DRM}+V_{RRM}+200V$	150	600		2200	V
I_{RRM}	Repetitive peak current	at V_{RRM}	150			10	mA
I_{FSM}	Surge forward current	10ms half sinewave	150			3.2	KA
I^2t	I^2T for fusing coordination	$V_R=0.6V_{RRM}$				50	$A^2s \times 10^3$
V_{FO}	Threshold voltage		150			0.80	V
r_F	Forward slop resistance					1.14	$m\Omega$
V_{FM}	Peak forward voltage	$I_{FM}=250A$	25			1.1	V
$R_{th(j-c)}$	Thermal resistance Junction to heatsink	Single side cooled				0.150	C /W
V_{iso}	Isolation voltage	50Hz, R.M.S, t=1min, $I_{iso}: 1mA$ (max)	2500				V
F_m	Terminal connection torque (M6)					3.0	N · m
	Mounting torque (M5)					2.0	N · m
T_{Stg}	Stored temperature			-40		125	C
W_t	Weight				446		g
Outline							

OUTLINE DRAWING & CIRCUIT DIAGRAM

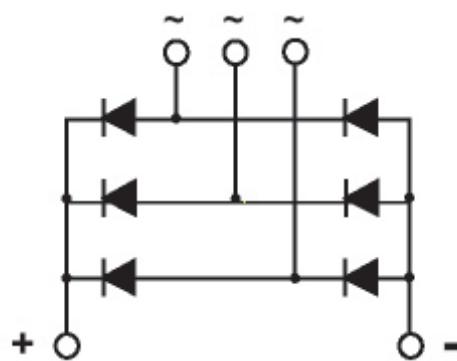

Rating and Characteristic

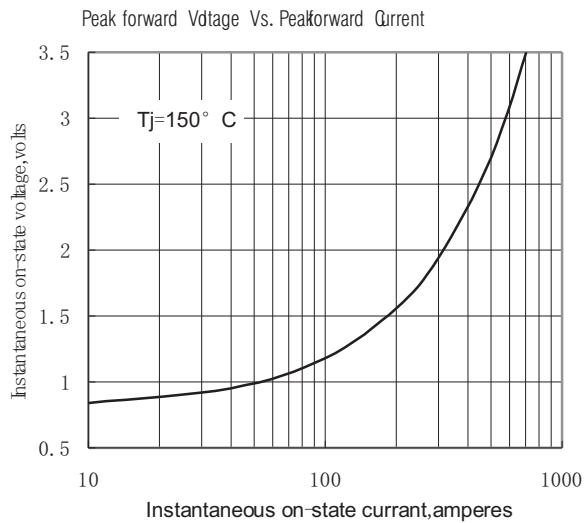


Fig. 1

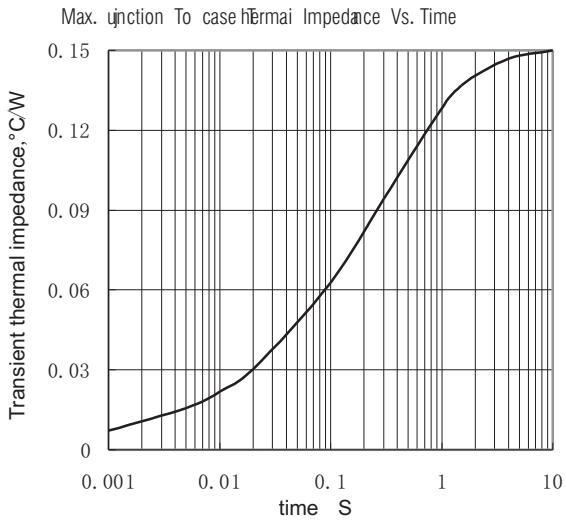


Fig. 2

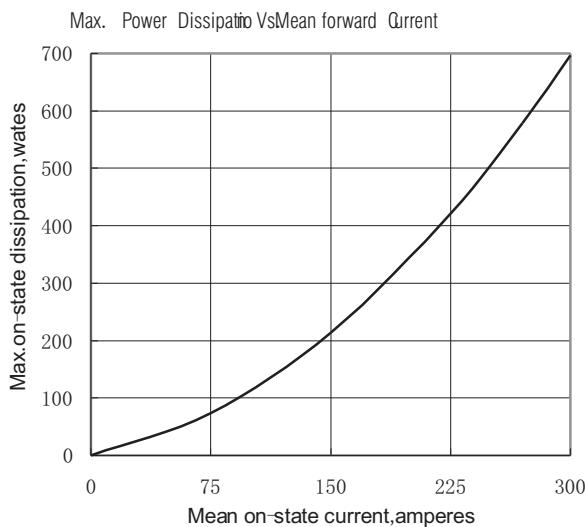


Fig. 3

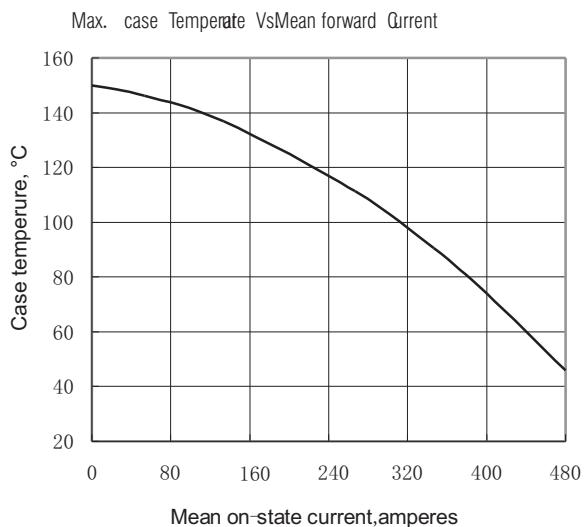


Fig. 4

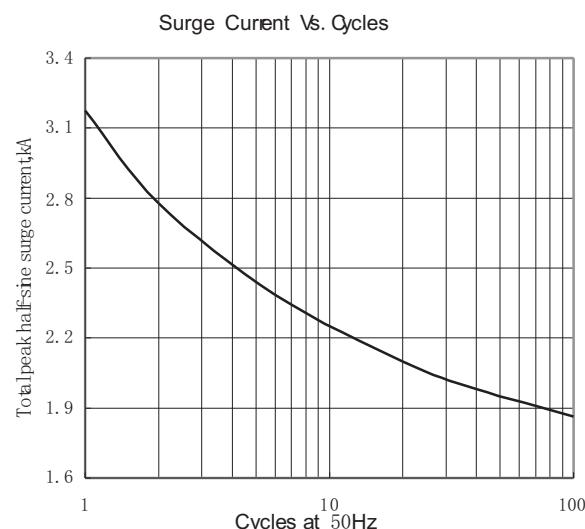


Fig. 5

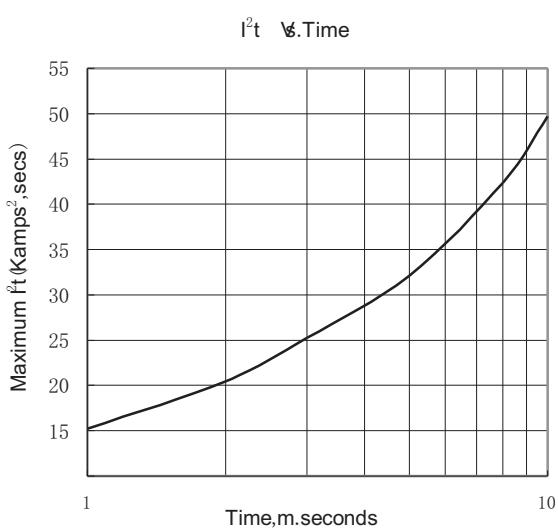


Fig. 6

Outside Dimension

2- M8

