



浙江芯芯电子有限公司
ZHEJIANG XINXIN ELECTRICAL CO., LTD.

产品规格书

Specification of Products

产品名称：可控硅模块

产品型号：MFC90A

浙江芯芯电子有限公司

ZHEJIANG XINXIN ELECTRICAL CO., LTD.

地址：浙江省缙云县壶镇镇浙江丽缙五金科技产业园苍山区块内

电话： 13857067071

邮编： 321404

E-mail:247145749@qq.com


<http://www.zjxxdz1.com>

拟制	审核	核准
丁国盛	李园利	麻伟阳

版本号：04 更新日期：2022.6.28

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	T_j (°C)	VALUE			UNIT
				Min	Type	Max	
$I_{T(AV)}$ $I_{F(AV)}$	Mean on-state current	180° half sinewave 50Hz Single side cooled, $T_c=85^\circ\text{C}$	125			90	A
$I_{T(\text{RMS})}$	RMS on-state current	Single side cooled, $T_c=85^\circ\text{C}$	125			141	A
V_{DRM} V_{RRM}	Repetitive peak off-state voltage Repetitive peak reverse voltage	$V_{DRM} \& V_{RRM}$ tp=10ms $V_{DsM} \& V_{RsM} = V_{DRM} \& V_{RRM} + 200\text{V}$ respectively	125	600		1600	V
I_{DRM} I_{RRM}	Repetitive peak current	at V_{DRM} at V_{RRM}	125			10	mA
I_{TSM}	Surge on-state current	10ms half sinewave	125			2.00	KA
I^2t	I^2T for fusing coordination	$V_R=60\%V_{RRM}$				20.4 $\text{A}^2\text{s} \times 10^3$	
V_{TO}	Threshold voltage		125			0.8	V
r_T	On-state slop resistance					3.01	$\text{m}\Omega$
V_{TM}	Peak on-state voltage	$I_{TM}=270\text{A}$	125			1.4	V
dv/dt	Critical rate of rise of off-state voltage	$V_{DM}=67\%V_{DRM}$	125			800	$\text{V}/\mu\text{s}$
di/dt	Critical rate of rise of on-state current	From 67% V_{DRM} to 270A, Gate source 1.5A $t_r \leq 0.5\ \mu\text{s}$ Repetitive	125			100	$\text{A}/\mu\text{s}$
I_{GT}	Gate trigger current		25	20		100	mA
V_{GT}	Gate trigger voltage	$V_A=12\text{V}, I_A=1\text{A}$		0.7		2.0	V
I_H	Holding current			20		100	mA
V_{GD}	Non-trigger gate voltage	At 67% V_{DRM}	125			0.2	V
$R_{th(j-c)}$	Thermal resistance Junction to heatsink	At 180° sine Single side cooled				0.280	$^\circ\text{C}/\text{W}$
V_{iso}	Isolation voltage	50Hz, RM. S, t=1min, $i_{lo}: 1\text{mA MAX}$)		2500			V
F_m	Thermal connection torque(M5)				0.2		N.m
	Mounting torque(M6)				0.3		N.m
T_{stg}	Stored temperature			-40		140	$^\circ\text{C}$
W_t	Weight				154		g
Outline							

OUTLINE DRAWING & CIRCUIT DIAGRAM

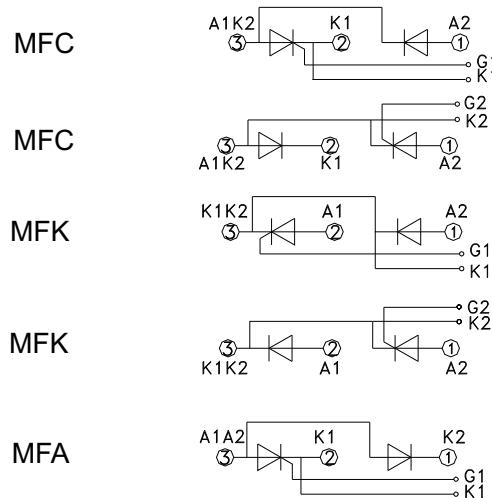

Rating and Characteristic

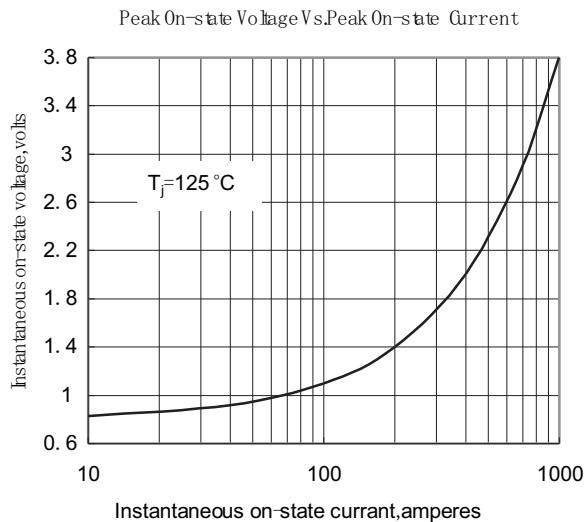


Fig. 1

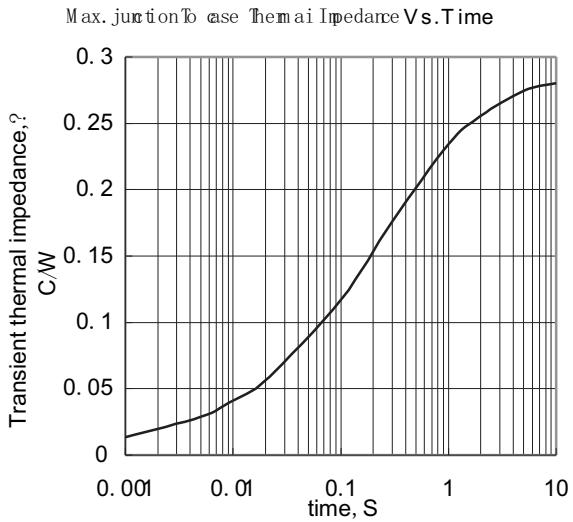


Fig. 2

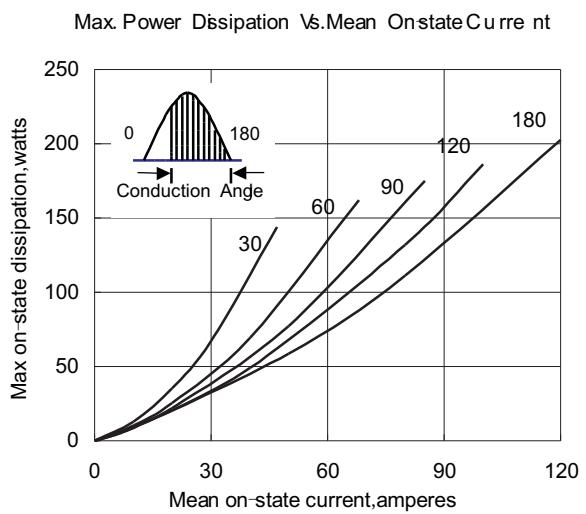


Fig. 3

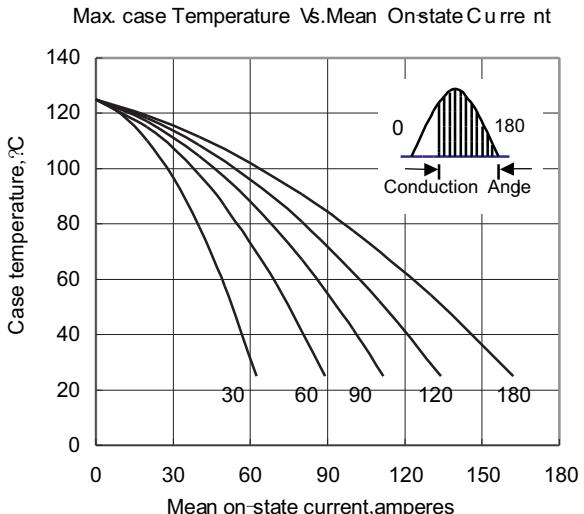


Fig. 4

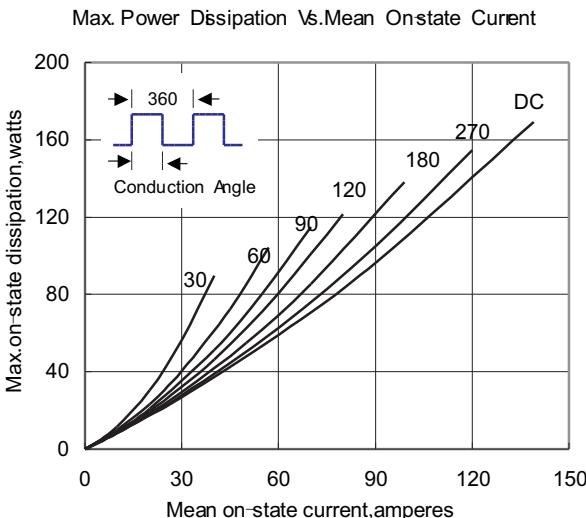


Fig. 5

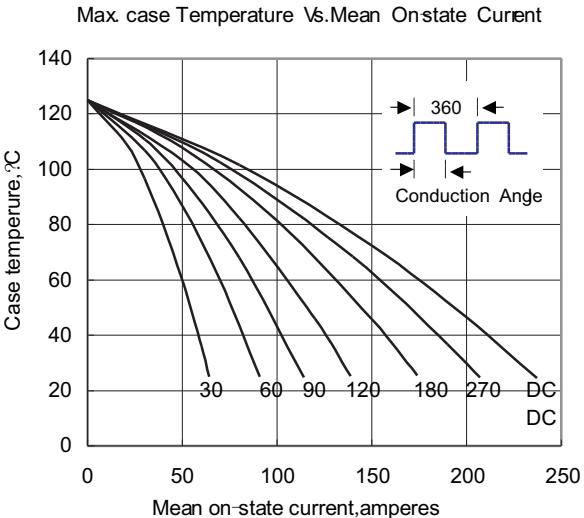


Fig. 6

Rating and Characteristic

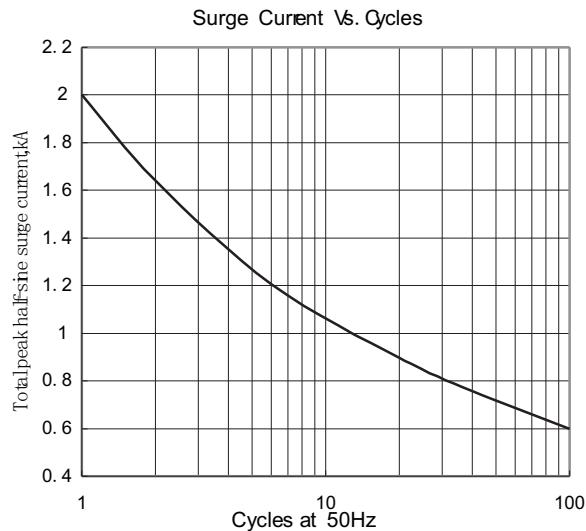


Fig. 7

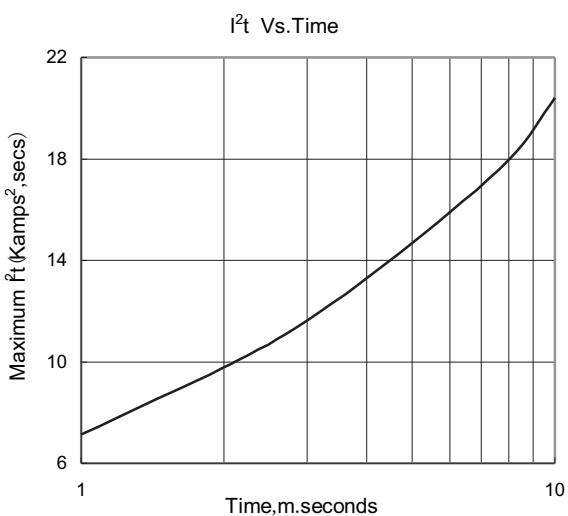


Fig. 8

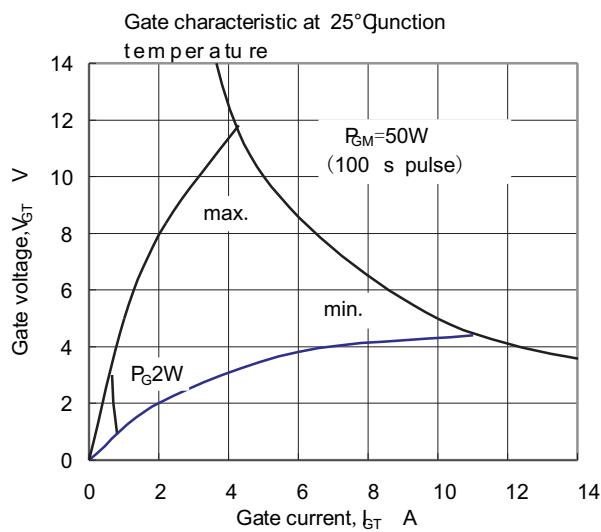


Fig. 9

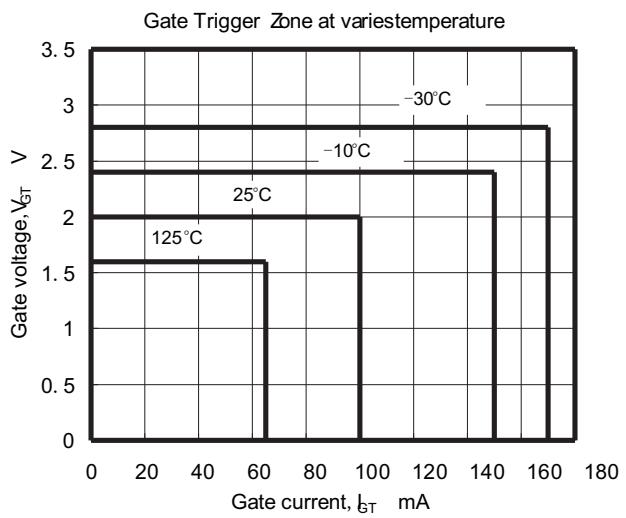


Fig. 10

震扬®

浙江芯芯电子有限公司
ZHEJIANG XINXIN ELECTRICAL CO., LTD.

